

Building Guide


International Code Council

Single Family Residential Uncovered Decks and Porches

How to Use this Guide

Provide two sets of plans, drawn to scale and complete the following (hint: use graph paper with $\frac{1}{4}$ " squares. Example: $\frac{1}{4}$ " = 1'): Check with your jurisdiction for additional requirements.

- **1. Complete this Building Guide** by filling in the blanks on page two, and indicating which construction details will be used.
- **2. Provide 2 Plot Plans** (site plan) showing dimensions of your project or addition and its relationship to existing buildings or structures on the property and the distance to existing property lines drawn to scale. See page 3.
- 3. Fill out a building permit application.

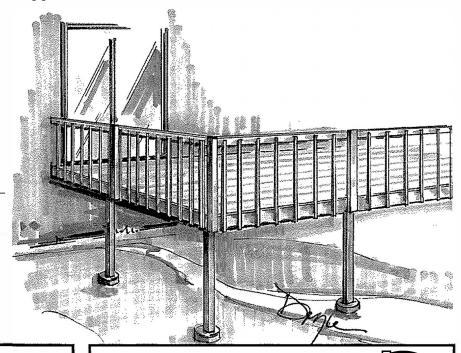

This handout was developed by the Colorado Chapter of the International Code Council as a basic plan submittal under the 2012 International Residential Code. It is not intended to cover all circumstances. Check with your Department of Building Safety for additional requirements.



Single Family Residential Uncovered Decks and Porches **Directions** Address: 1. Fill in the blanks. Please print legibly. 2. Indicate in the check box which detail from page 4 will be used. Size and Spacing of Lags (example: Two 1/2"x 4 1/2" lags @ 16" O.C.) Type of decking _ (example: 1 x 4 or 2 x 6 - Trex) **Deck Section** Existing bldg. 36" high guard Electrical outlet " apart with balusters spaced required on decks spaced so that a (example: 2 x 10" spaced 24" apart) 4 Inch diameter sphere cannot pass through Approved flashing required Beam splices to occur over beam posts with 1 1/2" bearing (example: (2) 2 x 10 - see detail B) Attach decking with non corrosive fasteners rim joist (example: 2 x 10 - see Alternate B1 & B2) 🖊 Check one note) Detail B □ Alternate Detail B1 (see I posts □ Alternate Detail B2 _ apart spaced Detail A (see page 4) (example: 4 x 4 posts spaced 8' apart) (see page 3) Conditions such as attachment to cantilevers or veneers may 芷 (example: 13' - 4") require Engineer's approval Span Type of siding (existing) Detail C (see page 4) Finished grade Note: Emergency escape windows are allowed Inches Min. to be installed under decks and porches provided the location of the deck allows the emergency escape window to be fully opened and provides a path not less than 36" in height to a yard or court. 6'8" required for walk out basements or patios.

Note: A plot plan (plan view) showing the dimensions of your project or additions and its relationships to existing buildings or structures on the property must be included. In addition to project dimensions, your plot plan must also show other details such as post locations and spacing, joist and beam spans, and any other pertinent information not shown on the section drawing.


This handout was developed by the Colorado Chapter of the International Code Council as a basic plan submittal under the 2012 International Residential Code. It is not intended to cover all circumstances. Check with your Department of Building Safety for additional requirements.

Permit #:




Single Family Residential Uncovered Decks and Porches

Plan View Example

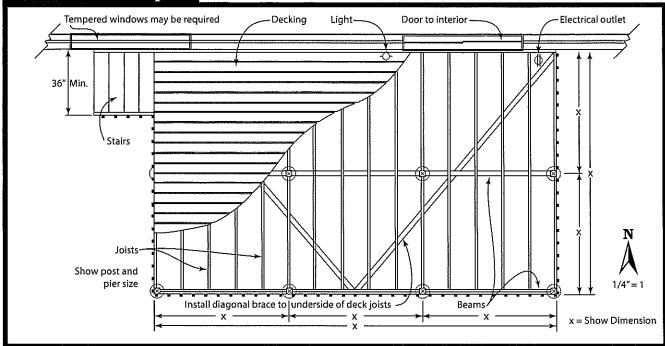

Site Plan Example

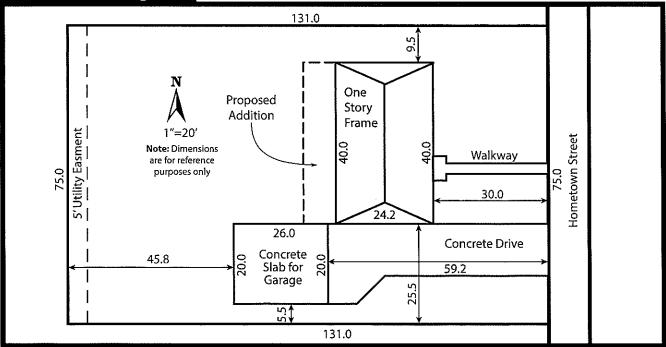


This handout was developed by the Colorado Chapter of the International Code Council as a basic plan submittal under the 2012 International Residential Code. It is not intended to cover all circumstances. Check with your Department of Building Safety for additional requirements.




Single Family Residential Uncovered Decks and Porches


Detail A

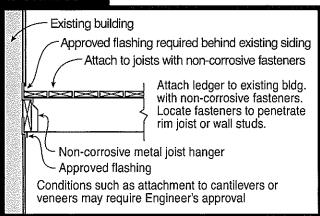


Detail B

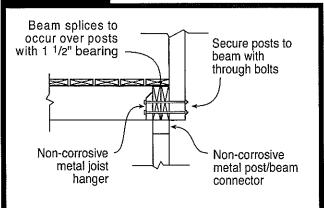


Alternate Detail B1

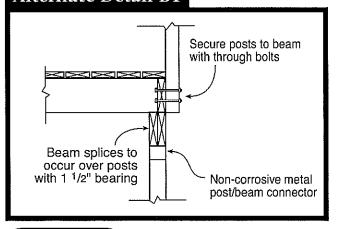

Alternate Detail B2

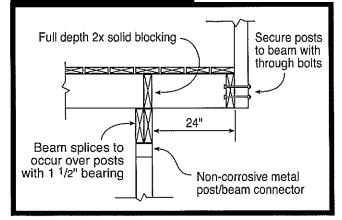

Detail C

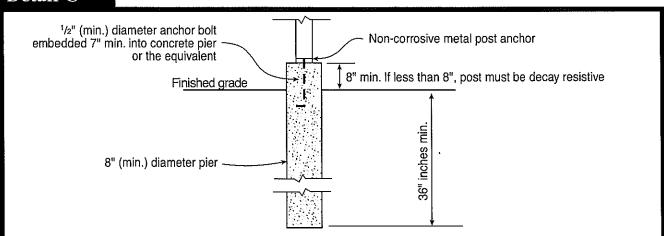


This handout was developed by the Colorado Chapter of the International Code Council as a basic plan submittal under the 2012 International Residential Code. It is not intended to cover all circumstances. Check with your Department of Building Safety for additional requirements.



Single Family Residential Uncovered Decks and Porches


Stair & Handrail Specifications

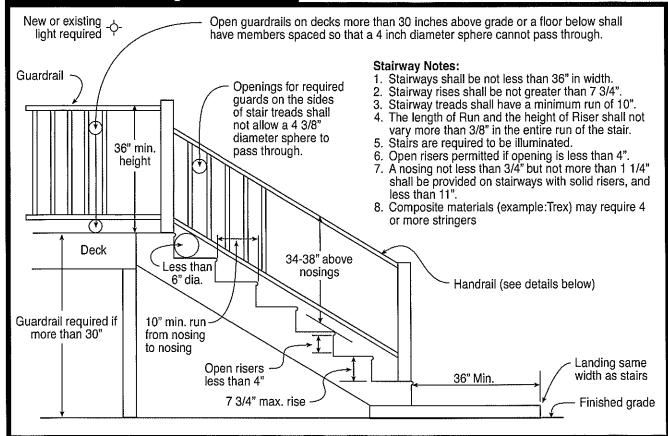

Handrail Notes:

- 1. Handrails shall be continuous on at least one side of stairs with 4 or more risers.
- 2. Top of the handrails shall be placed not less than 34 inches nor more than 38 inches above stair nosings.
- The handgrip portion of handralls shall be not less than 1-1/4 inches nor more than 2 1/4 inches in cross section for non circular handralls.
- 4. Handrails shall be placed not less than 1-1/2 inches from any wall or other surface.
- 5. Handrails to be returned to wall, post or safety terminal (per 311.7.8.2 IRC)

Acceptable Handrail Details

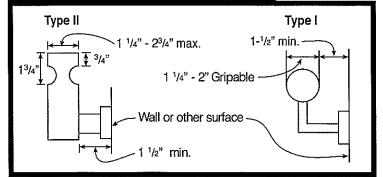

This handout was developed by the Colorado Chapter of the International Code Council as a basic plan submittal under the 2012 International Residential Code. It is not intended to cover all circumstances. Check with your Department of Building Safety for additional requirements.

Unacceptable Handrails

